


# SYNTHO-GLASS® 24

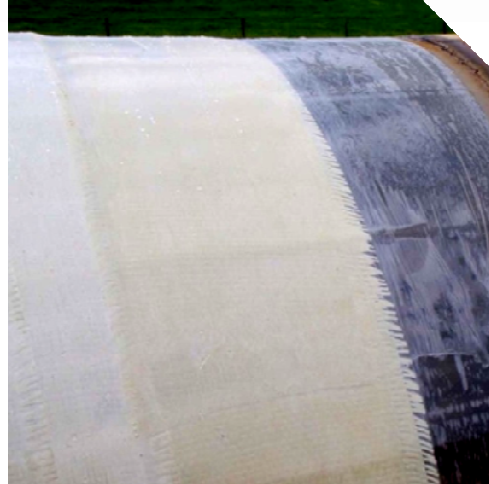

## Description

Syntho-Glass®24 consists of a thick fiberglass mat which is pre-impregnated with a water activated resin that hardens into a high energy absorbing and impact resistant rock shield. This system, when used with the preapproved corrosion coating of your choice, provides exceptional mechanical and impact protection. Syntho-Glass 24 can be used underwater, underground or above ground pipes and piles.

## Mechanical Properties

Test	Method	Result
Tensile Strength	ASTM D3039	54,370 psi (3748 bar)
Flexural Strength	ASTM D790	44,845 psi (3,093 bar)
Dielectric Strength	ASTM D149	16,060 Volts
Impact Resistance	ASTM G14 / G62	123 ft. lb. (167 J)



## Typical Applications

- Mechanical protection

## Benefits

- Impact resistance
- Energy absorbing
- Easy to apply
- No mixing, no measuring ensures consistent glass to resin ratio, therefore consistent results
- Can be applied in any weather condition, even underwater
- Our thickest water activated fiberglass provides strong impact resistant shell with only 4 layers
- Contains no solvents

## Physical Properties

VOCs: None

Working Time:

30 Minutes @ 75°F (24°C)

Initial Cure Time: 2 Hours

Resin Type:

Water-activated polyurethane

Resin Application: Pre-impregnated

Service Temperature:

-50° to 250°F (-46° to 121°C)

Application Temperature:

32° to 150°F (-18° to 65°C)

Shelf Life: 12 months

Substrates:

Steel, Galvanized, Concrete, FRP, Iron, PVC, Wood

©Neptune Research Inc. (NRI) NRI® and Syntho-Glass®24 are registered trademarks of NRI. NRI utilizes a process of continuous product improvement for all of our products. While we do strictly adhere to our products' specifications, we routinely implement product improvements. Therefore, please contact your local NRI distributor or office for the most current product specifications. NRI warrants the quality of this product when used according to directions. User shall determine suitability of product for use and assumes all risk. The seller will not accept liability for more than product replacement. SG24 DS 0711

**NRI**  
Innovative Composite Solutions